


TS 25/4

2-way sound column, ideal for speech and background music in churches, conference rooms, lecture theatres, ... The TS 25/4 features four 87 mm full-range chassis and two 66 mm dome tweeters. This produces focussed vertical radiating characteristics which is reinforced at high frequencies by the additional tweeters. Assembly is via two brackets included in the delivery. The housing underside has a 1/2" thread and M6 insert. The optional reducing flange for a speaker stand RF 25 is fitted to this point.

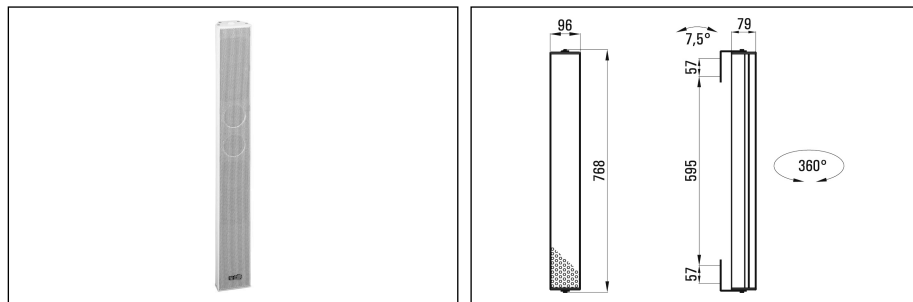

Technical Data	TS 25/4-T25
Load Rating / Music Power	25 W
Transformer	25/12.5/6.25 W
SPL 1W/1m	95 dB
SPL PNenn/1m	109 dB
SPL PNenn/1m/f	115 dB/18 kHz
Frequency Range (-3 dB)	250-20000 Hz
Frequency Range (-10 dB)	180-23000 Hz
Transmission Angle, horizontale 1/2/4/8 kHz (-6 dB)	120/-/70/60 °
Transmission Angle, verticale 1/2/4/8 kHz (-6 dB)	80/-/70/60 °
Component Set	4 x PM 87-8, 2 x PM 66-16
Material	Housing: aluminium, grille: metal
Net Weight	4.6 kg
Colors	white (RAL 9010), black (RAL 9005)
Accessories	incl. 2 mounting stirrups, as an option RF25: reducing flange for speaker stand